

# GSR1290 SEMI-AUTO ROUTER MACHINE

## TOTAL SOLUTION FOR ROUTER BUSINESS

As a world leader in PCB Depaneling systems, **GETECH** presents **GSR1290**. A stand-alone machine designed for high-speed routing and high volume production of Large PCB panels.

910mm x 610mm (35.8" x 24")



## FEATURES

**HIGH-SPEED ROUTING**

**HIGH-RESOLUTION CAMERA**

**MANUAL LOADING/UNLOADING**

**RIGID FIXTURING AND EASY REPLACEMENT**

**UNIVERSAL/DEDICATED FIXTURES AVAILABLE**

**SAFETY PROTECTION ENCLOSURE CABINET W/ INTERNAL PARTITION**

**HIGH ACCURACY & QUALITY CUT**

**POWERFUL DUAL VACUUM SYSTEM**

**USER FRIENDLY SOFTWARE**


**CE CERTIFICATION (OPTION)**



ISO 9001 : 2015 Cert. No.: 622220

# GSR 1290 Semi-auto Router Machine

Local Agent:

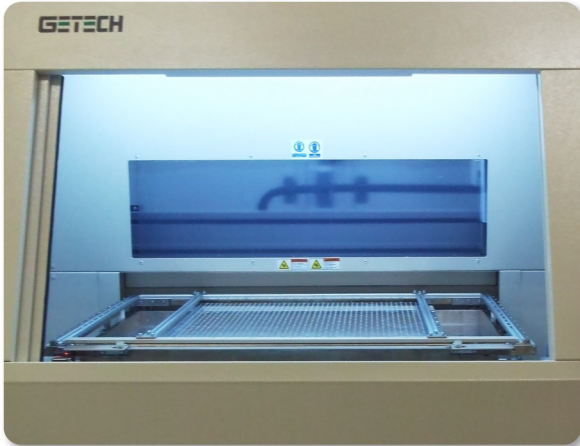

The GSR1290 is a single table standalone router machine that is specially designed to route (de-panelize) large panels with PCB size of 910mm x 610mm into individual units. It is capable of speeds of up to 100mm/s and positioning speeds of 1000mm/s. The superior servo axis system provides high acceleration/deceleration, reducing cycle time (increase in production output) and at the same time maintaining high accuracy cutting.

Using a high-resolution CCD camera, and GSR user-friendly Windows-based software allows the user to program the routing paths in minutes. There are also no limitations in the number of programs stored. GSR1290 uses high-quality components and a welded steel structure to ensure rigidity and high performance. All the axes and linear guides used are protected from dust and dirt to increase lifespan and performance.

## SPECIFICATIONS

<b>Routing Capability</b>	Non-Routing Speed	: 1000 mm/sec
	Routing Speed	: 100 mm/sec max (depending on material, cutting quality & tool diameter)
	Repeatability	: ±0.1 mm straight lines, curves and interpolated profiles
<b>Manipulator</b>	Configuration	: X, Y, & Z axis
	Manipulator Motors	: AC brushless servo motors
	Manipulator Repeatability	: ±0.02 mm
	Resolution	: ±0.01 mm
<b>Workstation</b>	Design	: Single workstation with dedicated fixtures, Manual panel Loading/unloading
	Panel Positioning	: Located by tooling holes or edges of PCB
	Panel Size	: 910 mm x 610 mm (35.8" x 24")
	Panel Clamping	: No Top clamp (Standard) / Hinged Top clamp with gas spring assist (Option)
	Panel Thickness	: 0.4 mm – 8.0 mm
	Component Height	: Top max. 12 mm, Bottom max. 50 mm (Standard) / 65 mm (Option)
	Panel Access	: Automatic Sliding door
<b>Spindle System</b>	Spindle Motor	: 0.5 kW (60,000 rpm) spindle with ESD / Ceramic bearings
	Options	: 0.42 kW (100,000 rpm)
	Tool Change	: Manual tool change
	Cooling	: Ambient cooled
	Router bit	: Shank size 3.175 mm (1/8")
<b>Dust Filtration System</b>	Power	: 2 x 3.0 kW rotary vane vacuum blower
	Filtration	: 3 stage filtrations with disposable filter bag (10 microns)
	Vacuum Location	: Top vacuum on spindle
	Extraction Hose (x2)	: ID 51 mm (2"), L= 4M
	Noise Level	: <78 dB
<b>Vision System</b>	Video camera	: High resolution CCD video camera
<b>Programming</b>	System Platform	: Windows <sup>®</sup> based Industrial PC
	Product Setup	: Vision assisted point to point manual teaching, vision assisted editing function / test run mode
	Variable Functions	: Tool bit diameter compensation, Filter change interval (distance) setting. Tool bit wear compensation. Other options available.
	Options	: Bar code support (1D or 2D), Fiducial alignment
<b>Operation Monitor</b>	Router Bit	: Tool life tracking, PCB board count, tool broken sensor
	Vacuum	: Vacuum filter change alarm
	Machine	: Machine error history
<b>Maintenance</b>	Router Bit	: 100 to 300 M cutting distance before next tool change (depending on PCB)
	Filter Bag	: 1000 to 1500 M before next filter bag change
	Cleaning hose	: Extra hose for internal periodic cleaning included
<b>Safety Features</b>	"E" Stops, Spindle stop, Spindle motor overheat & Servo overload detection, Enclosed work area	
<b>Dimensions &amp; Utilities</b>	Machine Size (W x D x H)	: 1,620 mm x 1,745 mm x 1,700 mm
	Vacuum Tank Size (Ø x H)	: 2 x 400 mm x 800 mm
	Weight (Main + 2 Tanks)	: Approx. 900kg + 50Kg
	Power Supply	: 3-phase, 380~415V, 50 Hz, 13.0 kW   3-phase, 208~240V, 60 Hz, 22.6 kW